

PVC-FULLY INSULATED FEMALE DISCONNECTS




ITEM NO	DIMENSIONS inch(mm)					WIRE RANGE A.W.G. mm ²
	TAB SIZE	D	B	L	t	
ITFT-VF1.25-110(5)A	0.110*0.020	0.142(3.60)	0.130(3.30)	0.748(19.00)	0.010(0.25)	22-16 A.W.G. 0.5-1.5 mm ²
	2.8*0.5					
ITFT-VF1.25-187(5)A	0.187*0.020	0.178(3.50)	0.197(5.00)	0.728(18.50)	0.016(0.40)	
	4.8*0.5					
ITFT-VF1.25-250A	0.250*0.032	0.157(4.00)	0.264(6.70)	0.866(22.00)	0.016(0.40)	
	6.48*0.8					
ITFT-VF2-110(5)A	0.110*0.020	0.142(3.60)	0.130(3.30)	0.748(19.00)	0.010(0.25)	16-14 A.W.G. 1.5-2.5 mm ²
	2.8*0.5					
ITFT-VF2-187(5)A	0.187*0.020	0.177(4.50)	0.197(5.00)	0.787(20.50)	0.016(0.40)	
	4.8*0.5					
ITFT-VF2-250A	0.250*0.032	0.177(4.50)	0.264(6.70)	0.866(22.00)	0.016(0.40)	
	6.48*0.8					
ITFT-VF5.5-250A	0.250*0.032	0.217(5.50)	0.264(6.70)	0.945(24.00)	0.016(0.40)	12-10 A.W.G. 4-6 mm ²
	6.4*0.8					

Packaging: 100 pcs per packet

Features

1. Terminal material is Copper (instead of Brass).
2. Easy-entry/Funnel-entry advantage.
3. UL Listed (E163810 & E318463).
4. RoHS Compliant.
5. REACH Compliant.

PVC-FULLY INSULATED FEMALE DISCONNECTS (DOUBLE CRIMP)

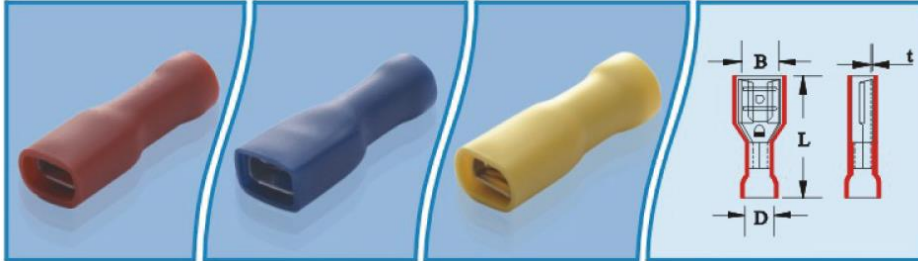

ITEM NO	DIMENSIONS inch(mm)					WIRE RANGE A.W.G. mm ²
	TAB SIZE	D	B	L	t	
ITFT-VF2-250AC	0.250*0.032	0.193(4.90)	0.264(6.70)	0.906(23.00)	0.016(0.45)	16-14 A.W.G. 1.5-2.5 mm ²
	6.4*0.8					
ITFT-VF5.5-250AC	0.250*0.032	0.276(7.00)	0.264(6.70)	0.984(25.00)	0.016(0.45)	12-10 A.W.G. 4-6 mm ²
	6.4*0.8					

Packaging: 100 pcs per packet

Features

6. Terminal material is Copper (instead of Brass).
7. Easy-entry/Funnel-entry advantage.
8. UL Listed (E163810 & E318463).
9. RoHS Compliant.
10. REACH Compliant.