


NON-INSULATED SPADE TERMINALS

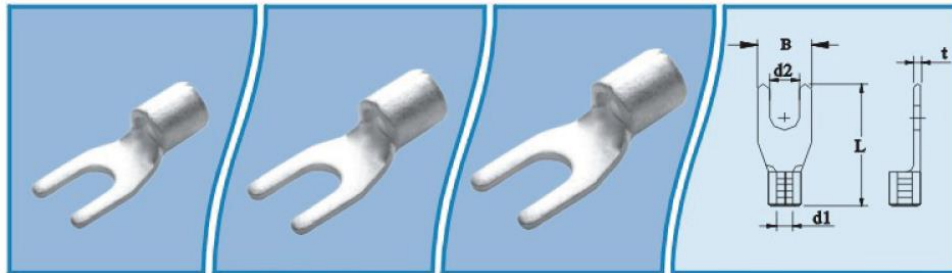

ITEM NO	DIMENSIONS inch(mm)					STUD SIZE	WIRE RANGE A.W.G. mm ²
BRAZED SEAM	d1	d2	B	L	T		
ITFT-S1.25-3.5SB	0.075 (1.9)	0.146(3.70)	0.224(5.70)	0.630(16.0)	0.030(0.75)	#6	22-16 A.W.G. 0.5-1.5 mm ²
ITFT-S1.25-4B		0.169(4.30)	0.283(7.20)	0.630(16.0)		#8	
ITFT-S1.25-4SB		0.169(4.30)	0.252(6.40)	0.630(16.0)		#8	
ITFT-S1.25-5B		0.209(5.30)	0.315(8.00)	0.630(16.0)		#10	
ITFT-S1.25-6SB		0.252(6.40)	0.366(9.30)	0.669(17.0)		1/4	
ITFT-S2-3B	0.098 (2.5)	0.126(3.20)	0.224(5.70)	0.630(16.0)	0.031(0.80)	#4	16-14 A.W.G. 1.5-2.5 mm ²
ITFT-S2-3.5SB		0.146(3.70)	0.224(5.70)	0.630(16.0)		#6	
ITFT-S2-4B		0.169(4.30)	0.283(7.20)	0.630(16.0)		#8	
ITFT-S2-4SB		0.169(4.30)	0.252(6.40)	0.630(16.0)		#8	
ITFT-S2-5B		0.209(5.30)	0.315(8.00)	0.630(16.0)		#10	
ITFT-S2-6B		0.252(6.40)	0.421(10.70)	0.669(17.0)		1/4	
ITFT-S2-6SB		0.252(6.40)	0.366(9.30)	0.669(17.0)		1/4	
ITFT-S5.5-3B	0.141 (3.6)	0.126(3.20)	0.287(7.30)	0.768(19.5)	0.039(1.00)	#4	12-10 A.W.G. 4-6 mm ²
ITFT-S5.5-3.5SB		0.146(3.70)	0.248(6.30)	0.768(19.5)		#6	
ITFT-S5.5-4B		0.169(4.30)	0.323(8.20)	0.768(19.5)		#8	
ITFT-S5.5-5B		0.209(5.30)	0.354(9.00)	0.768(19.5)		#10	
ITFT-S5.5-6B		0.252(6.40)	0.472(12.00)	0.906(23.0)		1/4	
ITFT-S5.5-6SB		0.252(6.40)	0.354(9.00)	0.906(23.0)		1/4	

Packaging: 100 pcs per packet

Features

1. Terminal material is Copper (instead of Brass).
2. Quality "brazed seam" does not separate during crimping.
3. UL Listed (E163810 & E318463).
4. RoHS Compliant.
5. REACH Compliant.