


LOW VOLTAGE CABLE LINK

Use for Copper Conductor.
Crimp Type for Hexagon and Indent Die.

High Conductivity Copper : 99% I.A.C.S
Copper Purity : 99.9%
Finishing : Tin Plated


Compliant to MS1779 (Malaysian Standard).

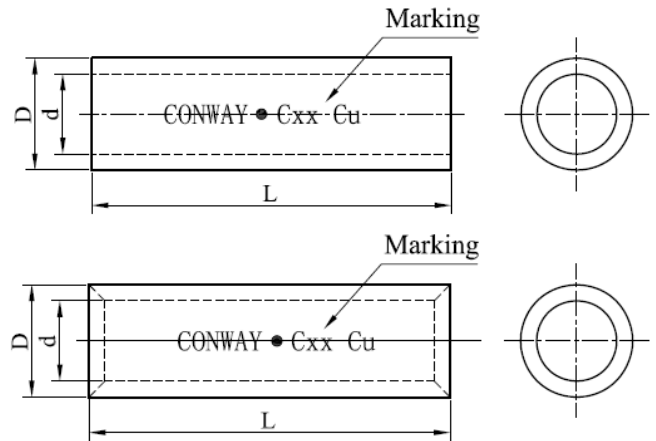

| Size | Item Code | L | D | d | Crimping Tool | Hexagon Die A/F | No. Of Crimps |
|---------------------|-----------|-----|------|------|----------------|-----------------|---------------|
| 1.5mm ² | CFMS-1.5 | 18 | 3.35 | 1.75 | CK-10 | Indent | 1 |
| 2.5mm ² | CFMS-2.5 | 18 | 3.9 | 2.3 | CK-10 | Indent | 1 |
| 4mm ² | CFMS-4 | 19 | 4.7 | 3.0 | CK-10 | Indent | 1 |
| 6mm ² | CFMS-6 | 20 | 5.3 | 3.6 | CK-10 | Indent | 1 |
| 10mm ² | CFMS-10 | 23 | 6.3 | 4.3 | CK-10 | Indent | 1 |
| 16mm ² | CFMS-16 | 30 | 7.8 | 5.6 | CP-300 | 6.4 | 1 |
| 25mm ² | CFMS-25 | 34 | 9.3 | 7.0 | CP-300 | 7.7 | 1 |
| 35mm ² | CFMS-35 | 38 | 10.8 | 8.4 | CP-300 | 8.9 | 1 |
| 50mm ² | CFMS-50 | 40 | 12.5 | 9.5 | CP-300 | 10.3 | 1 |
| 70mm ² | CFMS-70 | 45 | 14.4 | 11.2 | CP-300 | 11.9 | 1 |
| 95mm ² | CFMS-95 | 50 | 17.5 | 13.5 | CP-300 | 14.5 | 1 |
| 120mm ² | CFMS-120 | 54 | 19.0 | 14.6 | CP-300 | 15.7 | 2 |
| 150mm ² | CFMS-150 | 65 | 21.4 | 16.4 | CP-300 | 17.6 | 2 |
| 185mm ² | CFMS-185 | 68 | 23.7 | 18.5 | CP-300/ CP-630 | 19.5 | 2/ 1 |
| 240mm ² | CFMS-240 | 95 | 27.4 | 21.0 | CP-300/ CP-630 | 22.6 | 3/ 2 |
| 300mm ² | CFMS-300 | 100 | 30.5 | 23.5 | CP-630 | 25.2 | 2 |
| 400mm ² | CFMS-400 | 115 | 34.0 | 26.2 | CP-630 | 28.5 | 2 |
| 500mm ² | CFMS-500 | 120 | 38.6 | 30.0 | CP-630 | 32.1 | 3 |
| 630mm ² | CFMS-630 | 130 | 44.7 | 34.5 | CP-630 | 37.0 | 3 |
| 800mm ² | CFMS-800 | 150 | 50.6 | 39.0 | CP-1000 | 41.6 | 3 |
| 1000mm ² | CFMS-1000 | 165 | 56.2 | 43.0 | CP-1000 | 46.2 | 3 |

Notes :

1. All dimensions are in mm.
2. Other dimensions and customizations are available upon request.



CONWAY
Connecting Power

Tel : +6 03 5569 0600
H/P : +6 012 506 1068

Email : ask@conway.com.my
Web : www.conway.com.my