


NON-INSULATED BLADE (FLAT PIN) TERMINALS

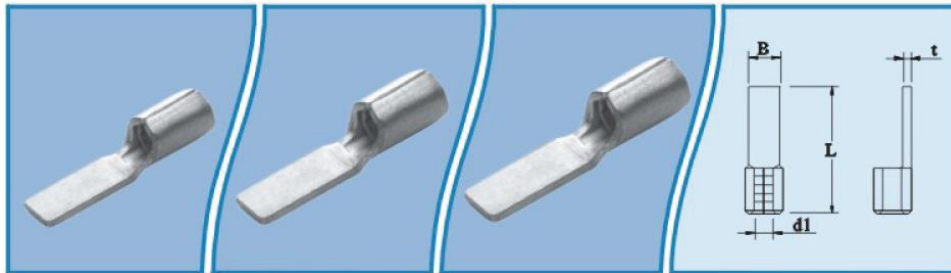

ITEM NO	DIMENSIONS inch (mm)				WIRE RANGE A.W.G. mm ²
	BRAZED SEAM	d1	B	L	
ITFT-BL1.25-9(2.3)B	0.075(1.90)	0.091(2.30)	0.551(14.00)	0.030(0.75)	22-16 A.W.G. 0.5-1.5 mm ²
ITFT-BL1.25-18B		0.096(2.45)	0.906(23.00)		
ITFT-BL2-9B	0.098(2.50)	0.110(2.80)	0.551(14.00)	0.031(0.80)	16-14 A.W.G. 1.5-2.5 mm ²
ITFT-BL2-18B		0.096(2.45)	0.906(23.00)		
ITFT-BL5.5-18(3.0)B	0.142(3.60)	0.118(3.00)	0.972(24.70)	0.039(1.00)	12-10 A.W.G. 4-6 mm ²

Packaging: 100 pcs per packet.

Features:

1. Terminal material is Copper (instead of Brass).
2. Quality "brazed seam" does not separate during crimping.
3. UL Listed (E163810 & E318463).
4. RoHS Compliant.
5. REACH Compliant.