


PVC-INSULATED BUTT SPLICE CONNECTORS

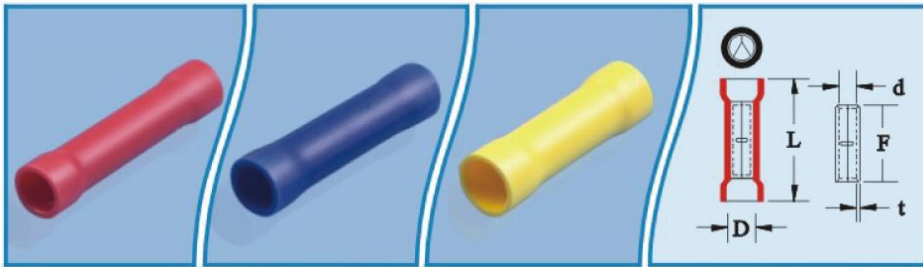

ITEM NO	MATERIAL	DIMENSIONS inch (mm)					WIRE RANGE A.W.G. mm ²
		D	d	L	F	t	
ITFT-VB1.25S	COPPER PLATE	0.157(4.00)	0.073(1.85)	0.945(24.00)	0.591(15.00)	0.020(0.50)	22-16 A.W.G. 0.5-1.5 mm ²
ITFT-VB2S	COPPER PLATE	0.169(4.30)	0.094(2.40)	0.945(24.00)	0.591(15.00)	0.020(0.50)	16-14 A.W.G. 1.5-2.5 mm ²
ITFT-VB5.5S	COPPER PLATE	0.248(6.30)	0.157(4.00)	1.004(25.50)	0.591(15.00)	0.002(0.50)	12-10 A.W.G. 4-6 mm ²
ITFT-VB5.5T	COPPER PLATE	0.256(6.50)	0.142(3.60)	1.063(27.00)	0.591(15.00)	0.039(1.00)	12-10 A.W.G. 4-6 mm ²

Packaging: 100 pcs per packet.

Features:

1. Terminal material is Copper (instead of Brass).
2. UL Listed (E163810 & E318463).
3. RoHS Compliant.
4. REACH Compliant.