


'C' TYPE CONNECTOR

Use for Copper Conductor.
 Dimpled and serrated to provide high pull-out value.
 Chamfered edges design to protect the cables.

High Conductivity Copper : 99% I.A.C.S
 Copper Purity : 99.9%
 Finishing : Tin Plated Min 3-microns

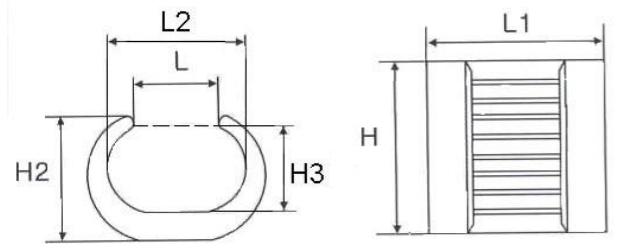

| Type | Item Code | L | L1 | L2 | H | H2 | H3 | Conductor Range (mm ²) | Crimping Tool | Hexagon Die | No. Of Crimps |
|--------|-----------|------|------|------|------|------|------|------------------------------------|---------------|-------------|---------------|
| U-T44 | CCUT-44 | 8.3 | 19.0 | 12.4 | 20.0 | 14.0 | 8.1 | 27-44 | TCCP-400 | CU70 | 1 |
| U-T60 | CCUT-60 | 10.8 | 21.4 | 15.3 | 22.5 | 15.0 | 10.0 | 45-60 | TCCP-400 | CU95 | 1 |
| U-T76 | CCUT-76 | 9.5 | 24.0 | 16.7 | 22.5 | 17.0 | 10.7 | 61-76 | TCCP-400 | CU120 | 1 |
| U-T98 | CCUT-98 | 14.5 | 28.0 | 21.2 | 25.0 | 19.0 | 13.4 | 77-98 | TCCP-400 | CU150 | 1 |
| U-T122 | CCUT-122 | 14.0 | 29.3 | 21.3 | 26.0 | 21.0 | 14.5 | 99-122 | TCCP-400 | CU185 | 1 |
| U-T154 | CCUT-154 | 17.0 | 35.0 | 23.8 | 28.0 | 25.0 | 16.8 | 123-154 | TCCP-400 | CU240 | 1 |
| U-T190 | CCUT-190 | 17.0 | 36.5 | 28.2 | 35.0 | 25.0 | 17.2 | 155-190 | TCCP-400 | CU300 | 2 |
| U-T240 | CCUT-240 | 20.0 | 40.0 | 30.2 | 40.0 | 29.0 | 21.3 | 191-240 | TCCP-400 | CU400 | 2 |
| U-T288 | CCUT-288 | 22.0 | 44.0 | 34.2 | 45.0 | 32.0 | 22.9 | 241-288 | TCCP-630 | CU400 | 2 |
| U-T365 | CCUT-365 | 27.5 | 48.0 | 37.6 | 50.0 | 34.0 | 24.2 | 289-365 | TCCP-630 | CU500 | 2 |
| U-T450 | CCUT-450 | 28.0 | 55.0 | 41.9 | 60.0 | 41.0 | 27.6 | 366-450 | TCCP-630 | CU630 | 3 |

Notes:

- All dimensions are in mm.

