

CW CABLE GLAND


This CW type brass cable gland is suitable for all types of Single Wire Armour (SWA) cable, providing mechanical cable retention and electrical continuity for armour wire termination. Clamping ring allows the cable to be easily disconnected from the equipment for maintenance. This feature also provides remote make-off procedures when the termination is done in areas with restricted access.

The CW type brass cable gland is suitable for both indoor and outdoor applications. It is designed and tested as per BS 6121 : Part 1:1989 and meets the requirements of EN 50262 : 1999.

Brand : Rupam
 Standard Gland Material : Brass
 Optional Gland Material : Nickel Plated Brass
 Ingress Protection Rating : IP54
 Cable Type : Single Wire Armour (SWA)
 Sealing Area : Cable Outer Sheath
 Design Specification : BS 6121 : Part 1: 1989



Available Accessories : PVC Shroud and Brass Earth Tag
 (to be purchased separately)

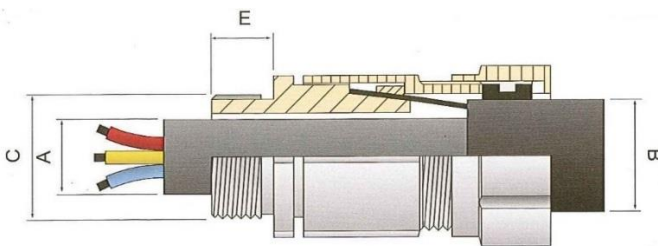

PVC Shroud and Brass Earth Tag

Item Code	Gland Size	Entry Thread		Cable Acceptance Details			Across Flat	Across Corner
		Dia 'C'	Length 'E' Min	Dia 'A' Max	Dia 'B' Max	Armour Dia		
ACCG-CW-20S	20 S	20	10	11.60	16.00	0.90/1.25	22.00	25.00
ACCG-CW-20L	20 L	20	10	14.50	20.50	0.90/1.25	25.40	28.50
ACCG-CW-25S	25 S	25	10	19.00	24.00	1.25/1.60	31.50	35.50
ACCG-CW-25L	25 L	25	10	20.50	27.00	1.25/1.60	33.00	37.00
ACCG-CW-32S	32 S	32	10	24.00	30.50	1.60/2.00	38.50	43.50
ACCG-CW-32L	32 L	32	10	27.00	33.00	1.60/2.00	41.00	46.50
ACCG-CW-40S	40 S	40	15	30.00	37.00	1.60/2.00	46.00	51.00
ACCG-CW-40L	40 L	40	15	33.50	41.00	1.60/2.00	48.50	55.00
ACCG-CW-50S	50 S	50	15	40.00	47.00	2.00/2.50	57.00	64.00
ACCG-CW-50L	50 L	50	15	44.00	52.60	2.00/2.50	61.00	68.00
ACCG-CW-63S	63 S	63	15	50.50	60.00	2.50	70.00	79.00
ACCG-CW-63L	63 L	63	15	56.00	66.00	2.50	78.00	86.00
ACCG-CW-75S	75 S	75	15	62.00	72.00	2.50	84.00	95.00
ACCG-CW-75L	75 L	75	15	68.00	78.00	2.50	92.00	102.00

Notes:

1. All dimensions are in mm.
2. Please consult with our sales personnel before order.