


TF TREFOIL CABLE CLEATS

These are Nylon cable cleats specially designed to withstand high mechanical bursting forces associated with fault current encountered in cable installation.

Suitable for fixing of three cable with outer diameter ranging from 33mm to 400mm. Mounting can be done easily on all type of channels.

NYLON (V2)

- UV Resistance
- Chemical/corrosion resistant
- UL-94 flame class V-2
- High impact resistance
- Heat distortion temperature 220°C

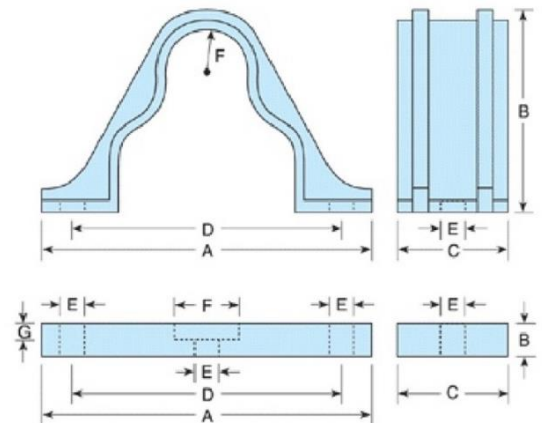

Brand: TF

Sizes available for Cable Cleats on Trefoil Configuration/ Three Cable.

Item Code	Cable Dia.	Std Pack	Dimensions					
			A	B	C	D	E	F
ACCC-TF3033	33	12	158	74	60	126	11	16.5
ACCC-TF3036	36	12	158	80	60	126	11	18.0
ACCC-TF3039	39	12	158	87	60	126	11	19.5
ACCC-TF3042	42	12	170	94	60	138	11	21.0
ACCC-TF3044	44	12	170	97	60	138	11	22.0
ACCC-TF3047	47	12	180	100	60	148	11	23.5
ACCC-TF3050	50	12	180	106	60	148	11	25.0
ACCC-TF3053	53	12	200	110	60	164	11	26.5
ACCC-TF3055	55	12	200	115	60	164	11	27.5
ACCC-TF3057	57	6	222	119	70	183	13	28.5
ACCC-TF3060	60	6	222	128	70	183	13	30.0
ACCC-TF3063	63	6	222	133	70	183	13	31.5
ACCC-TF3067	67	6	243	140	70	204	13	33.5
ACCC-TF3070	70	6	243	148	70	204	13	35.0
ACCC-TF3084	84	6	278	170	80	239	13	42.0
ACCC-TF3087	87	6	278	175	80	239	13	43.5



ACCC-TF3090	90	6	278	180	80	239	13	45.0
ACCC-TF3093	93	6	330	190	90	276	13	46.5
ACCC-TF3095	95	6	330	196	90	276	13	47.5
ACCC-TF3100	100	6	330	215	90	276	13	50.0
ACCC-TF3110	110	6	330	225	90	276	13	55.0
ACCC-TF3115	115	6	400	236	100	338	13	57.5
ACCC-TF3120	120	6	400	240	100	338	13	60.0

Sizes available for Cable Cleats on optional base.

Item Code	Dimensions						
	A	B	C	D	E	F	G
ACCC-BTF3033, 3036, 3039	158	25	60	126	11	24	10
ACCC-BTF3042, 3044	170	25	60	138	11	24	10
ACCC-BTF3047, 3050	180	25	60	148	11	24	10
ACCC-BTF3053, 3055	200	25	60	164	11	24	10
ACCC-BTF3057, 3060, 3063	222	25	70	183	13	41	12.5
ACCC-BTF3067, 3070, 3075	243	25	70	204	13	41	12.5
ACCC-BTF3084, 3087, 3090	278	25	80	239	13	41	12.5
ACCC-BTF3093, 3095, 3100, 3110	330	25	90	276	13	41	12.5
ACCC-BTF3115, 3120	400	25	100	338	13	41	12.5

Notes :

1. All dimensions are in mm.
2. Please consult our sales personnel before order.

