

CW CABLE GLAND

This CW type brass cable gland is suitable for all types of Single Wire Armour (SWA) cable, providing mechanical cable retention and electrical continuity for armour wire termination. Clamping ring allows the cable to be easily disconnected from the equipment for maintenance. This feature also provides remote make-off procedures when the termination is done in areas with restricted access.

The CW type brass cable gland is suitable for both indoor and outdoor applications. It is designed and tested as per BS 6121 : Part 1:1989 and meets the requirements of EN 50262 : 1999.


Brand : Rupam
 Standard Gland Material : Brass
 Optional Gland Material : Nickel Plated Brass
 Ingress Protection Rating : IP54
 Cable Type : Single Wire Armour (SWA)
 Sealing Area : Cable Outer Sheath
 Design Specification : BS 6121 : Part 1: 1989



Available Accessories : PVC Shroud and Brass Earth Tag
 (to be purchased separately)



PVC Shroud and Brass Earth Tag

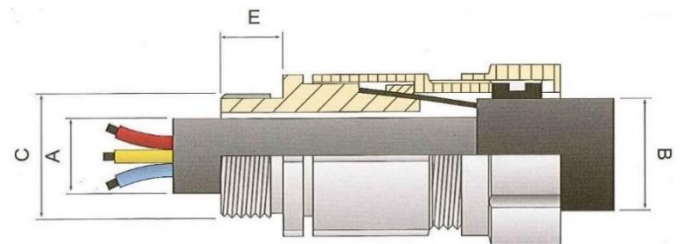

Item Code	Gland Size	Entry Thread		Cable Acceptance Details			Across Flat	Across Corner
		Dia 'C'	Length 'E' Min	Dia 'A' Max	Dia 'B' Max	Armour Dia		
ACCG-CW-20S	20S	20	10	11.60	16.00	0.90/1.25	22.00	25.00
ACCG-CW-20L	20L	20	10	14.50	20.50	0.90/1.25	25.40	28.50
ACCG-CW-25S	25S	25	10	19.00	24.00	1.25/1.60	31.50	35.50
ACCG-CW-25L	25L	25	10	20.50	27.00	1.25/1.60	33.00	37.00
ACCG-CW-32S	32S	32	10	24.00	30.50	1.60/2.00	38.50	43.50
ACCG-CW-32L	32L	32	10	27.00	33.00	1.60/2.00	41.00	46.50
ACCG-CW-40S	40S	40	15	30.00	37.00	1.60/2.00	46.00	51.00
ACCG-CW-40L	40L	40	15	33.50	41.00	1.60/2.00	48.50	55.00
ACCG-CW-50S	50S	50	15	40.00	47.00	2.00/2.50	57.00	64.00
ACCG-CW-50L	50L	50	15	44.00	52.60	2.00/2.50	61.00	68.00
ACCG-CW-63S	63S	63	15	50.50	60.00	2.50	70.00	79.00
ACCG-CW-63L	63L	63	15	56.00	66.00	2.50	78.00	86.00
ACCG-CW-75S	75S	75	15	62.00	72.00	2.50	84.00	95.00
ACCG-CW-75L	75L	75	15	68.00	78.00	2.50	92.00	102.00

Notes:

1. All dimensions are in mm.
2. Please consult with our sales personnel before order.