


# NON-INSULATED SPADE TERMINAL (FORK LUG)

- 1) Material : Copper with tin plated
- 2) Brazed Seam

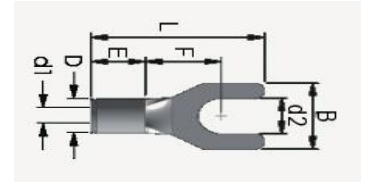

Item Code	Wire Range	d2	B	d1	F	L	Packing Unit
ITAI-Y1-3S	0.5~1.5mm <sup>2</sup> 22~16 AWG	3.7	5.8	1.7	6.3	16.0	100 pcs
ITAI-Y1-4S		4.3	6.4	1.7	6.3	16.0	
ITAI-Y1-5S		5.3	8.0	1.7	7.0	16.0	
ITAI-Y1-6S		6.4	9.5	1.7	7.0	16.0	
ITAI-Y2-3S	2.5mm <sup>2</sup> 16~14 AWG	3.7	5.8	2.3	6.3	16.0	100 pcs
ITAI-Y2-4S		4.3	6.4	2.3	6.3	16.0	
ITAI-Y2-5		5.3	8.5	2.3	7.3	17.0	
ITAI-Y2-6		6.4	9.5	2.3	7.3	17.0	
ITAI-Y5-3M	4~6mm <sup>2</sup> 12~10 AWG	3.7	7.2	3.4	7.5	18.7	100 pcs
ITAI-Y5-4S		4.3	8.5	3.4	7.5	18.7	
ITAI-Y5-5		5.3	9.5	3.4	7.5	18.7	
ITAI-Y5-6		6.4	9.5	3.4	7.5	18.7	
ITAI-Y8-4	6~10mm <sup>2</sup> 8 AWG	4.3	8.2	4.5	8.1	20.5	100 pcs
ITAI-Y8-5		5.3	9.0	4.5	8.1	20.5	
ITAI-Y8-6		6.4	10.8	4.5	8.6	22.5	
ITAI-Y14-5	10~16mm <sup>2</sup> 6 AWG	5.3	12.0	5.8	10.7	28.0	100 pcs
ITAI-Y14-6		6.4	12.0	5.8	10.7	28.0	
ITAI-Y22-6	16~25mm <sup>2</sup> 4 AWG	6.4	13.0	7.7	11.5	33.0	100 pcs
ITAI-Y22-8		8.4	15.0	7.7	11.5	33.0	

Notes:

- 1. All dimensions are in mm.