

HEAT SHRINK TUBING


Operating Temperature Range: -30°C to +125°C

Shrinkage Ratio : 2:1

Material: Cross-linked polyolefin

Standard Colours: Red, Yellow, Blue and Black

MELEC M-1 SOFT TUBE 125°C 600V VW-1 OFT (Ø20/10)

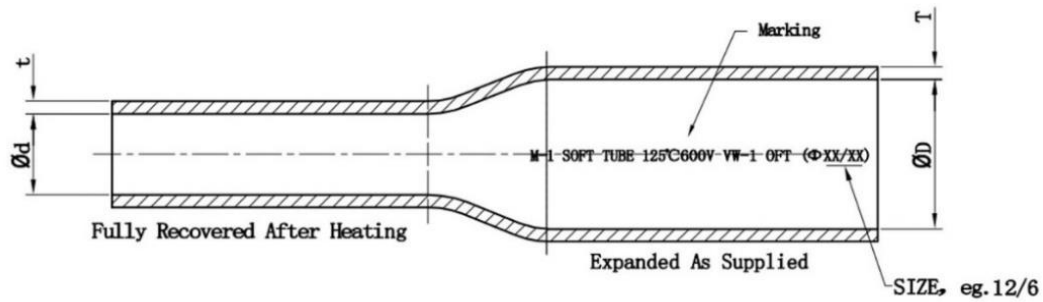

Item Code	Size (mm)	Expanded As Supplied (mm)		Fully Recovered After Heating (mm)		Standard Length (m)
		ØD	T	Ød	t	
*IAME-M1-10/5- X	10/5	10.5	0.30	≤5.0	0.56	100
IAME-M1-12/6- X	12/6	12.5	0.30	≤6.0	0.56	100
*IAME-M1-14/7- X	14/7	14.5	0.35	≤7.0	0.70	100
*IAME-M1-20/10- X	20/10	22.0	0.40	≤10.0	0.83	100
*IAME-M1-25/12.5- X	25/12.5	26.0	0.45	≤12.5	0.90	50
*IAME-M1-30/15- X	30/15	31.5	0.45	≤15.0	1.00	50
*IAME-M1-40/20- X	40/20	41.5	0.50	≤20.0	1.00	50
IAME-M1-50/25- X	50/25	51.0	0.55	≤25.0	1.10	25
IAME-M1-80/40- X	80/40	80.0	0.65	≤40.0	1.46	25