

HEAT SHRINK TRACK-RESISTANT TUBING

Used for medium voltage up to 33kV. Suitable for cable termination and intermediate connecting insulation protection.


Features:

- Anti-tracking
- Excellent corrosion resistance
- UV resistance and weathering resistance
- Halogen-free
- Superior electrical and mechanical properties
- Shrinkage ratio 3:1

Colour: Red

Operating Temperature: -40°C to +100°C

Type Test: IEC 60684

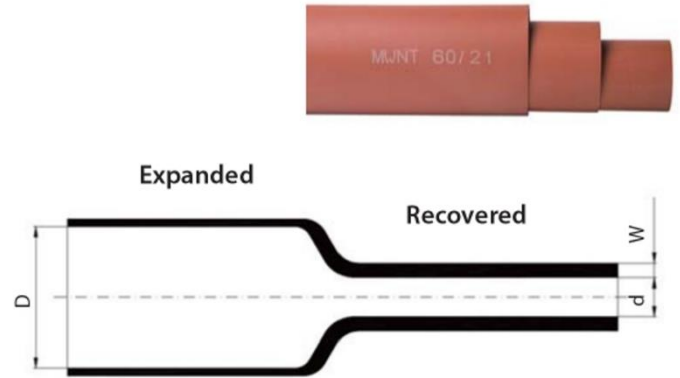

Item Code	Application Diameter Range	Expanded	Recovered	
		D (min)	d (max)	W (min)
IAME-MWNT-30/10	12 - 20	30	10	3.0
IAME-MWNT-38/12	14 - 25	38	12	3.0
IAME-MWNT-45/15	17 - 30	45	15	3.0
IAME-MWNT-55/18	20 - 36	55	18	3.0
IAME-MWNT-60/21	23 - 39	60	21	3.1
IAME-MWNT-75/25	28 - 49	75	25	3.2
IAME-MWNT-95/30	33 - 62	95	30	3.3
IAME-MWNT-115/37	40 - 75	115	37	3.5

Notes:

1. All dimensions are in mm.