

# MIB HEAT SHRINK INSULATION BREAKOUT

Used for medium voltage up to 33kV. Suitable for cable termination separation and protection against moisture and pressure.


**Features:**

- Hot melting adhesive provides better waterproof
- Coating type: Spiral coating
- Excellent corrosion resistance
- UV resistance
- Superior waterproof
- Superior electrical and mechanical properties
- Easy installation



Colour Standard: Black

Operating Temperature:  
-40°C to +100°C

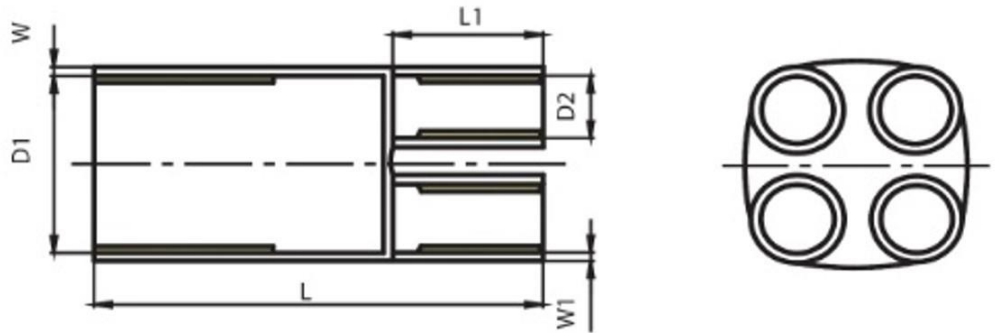

**3-core**

Item Code	D1		D2		W	W1	L	L1
	Expanded ID (min)	Recovered ID (max)	Expanded ID (min)	Recovered ID (max)	Recovered Wall Thickness (min)		Recovered Length (min)	
IAME- MIB3-38/15-14/4.5	38	15	14	4.5	2.2	2.0	90	22
IAME-MIB3-60/25-25/8	60	25	25	8.0	3.0	2.5	150	45
IAME-MIB3-80/38-35/24	80	38	35	14.0	3.5	3.0	165	45
IAME-MIB3-110/50-45/18	110	50	45	18.0	3.6	3.3	225	55
IAME-MIB3-125/57-55/20	125	57	55	20.0	3.6	3.3	235	65
*IAME-MIB3-140/70-62/26	140	70	62	26.0	4.0	3.8	235	65
*IAME-MIB3-170/77-75/30	170	77	75	30.0	4.0	3.8	235	65

**Notes:**

1. All dimensions are in mm.

**4-core**

Item Code	D1		D2		W	W1	L	L1
	Expanded ID (min)	Recovered ID (max)	Expanded ID (min)	Recovered ID (max)	Recovered Wall Thickness (min)		Recovered Length (min)	
IAME-MIB4-40/15-14/4	40	15	14	4.0	2.0	2.0	95	20
IAME-MIB4-55/22-20/6	55	22	20	6.0	3.0	2.5	135	35
IAME-MIB4-75/27-28/9	75	27	28	9.0	3.0	2.5	160	40
IAME-MIB4-90/37-32/11	90	37	32	11.0	3.5	2.5	170	50
IAME-MIB4-100/45-38/14	100	38	45	14.0	4.0	3.0	170	50

**Notes:**

1. All dimensions are in mm.