

# HEAT SHRINK BUSBAR INSULATION TUBING

Used for medium voltage substations up to 33kV to reduce electric clearance and increase insulation between busbars.


Features:

- Anti-tracking
- Excellent corrosion resistance
- UV and weather resistance
- Superior electrical and mechanical properties

Colour standard: Red

Operating Temperature: -40°C to +100°C

Type test : IEC 60684

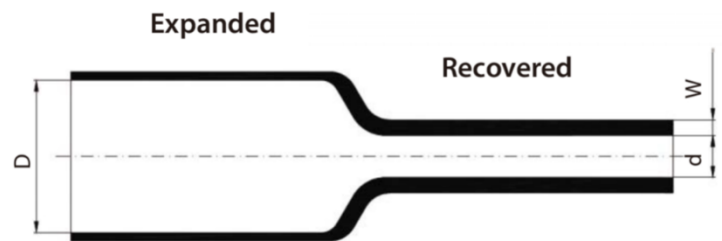

Item Code	Expanded	Recovered	
	D (min)	d (max)	W
IAME-MBT-15/6	15	6	2.00
IAME-MBT-30/12	30	12	2.30
IAME-MBT-50/20	50	20	2.50
IAME-MBT-70/25	70	25	3.00
IAME-MBT-75/30	75	30	2.50
IAME-MBT-90/30	90	30	3.00
IAME-MBT-100/40	100	40	2.50
IAME-MBT-120/50	120	50	3.00
IAME-MBT-170/60	170	60	3.00

Item Code	Expanded	Recovered	
	D (min)	d (max)	W
IAME-MBTH-25/10	25	10	4.0
IAME-MBTH-40/16	40	16	4.0
IAME-MBTH-65/25	65	25	4.0
IAME-MBTH-100/40	100	40	4.0

Notes:

1. All dimensions are in mm.