


CONSTANT FORCE SPRING

Suitable for bundling copper braids for grounding in cable straight joints and terminations.

Material: Stainless steel.

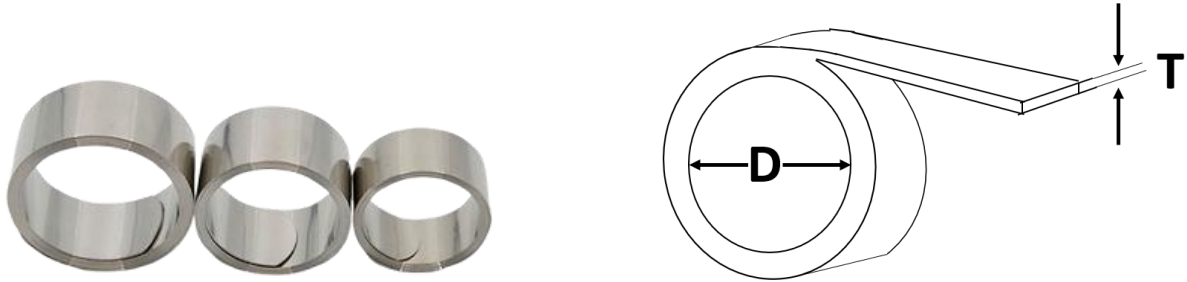

Item Code	Description	Application Range	Inner Diameter (D)	Thickness (T)
ACFS-MTH-D12	MTH-D12 13-22mm Constant Force Spring	13 - 22	12	0.16
ACFS-MTH-D16	MTH-D16 18-30mm Constant Force Spring	18 - 30	16	0.23
ACFS-MTH-D22	MTH-D22 25-40mm Constant Force Spring	25 - 40	22	0.27
ACFS-MTH-D28	MTH-D28 32-50mm Constant Force Spring	32 - 50	28	0.27
ACFS-MTH-D32	MTH-D32 35-60mm Constant Force Spring	35 - 60	32	0.35
ACFS-MTH-D38	MTH-D38 42-70mm Constant Force Spring	42 - 70	38	0.45
ACFS-MTH-D45	MTH-D45 50-90mm Constant Force Spring	50 - 90	45	0.45

Notes:

1. All dimensions are in mm.