


HEAT SHRINK TUBING

Operating Temperature Range: -30°C to +125°C

Shrinkage Ratio: 2:1

Material: Cross-linked polyolefin

Standard Colours: Red, Yellow, Blue, Black

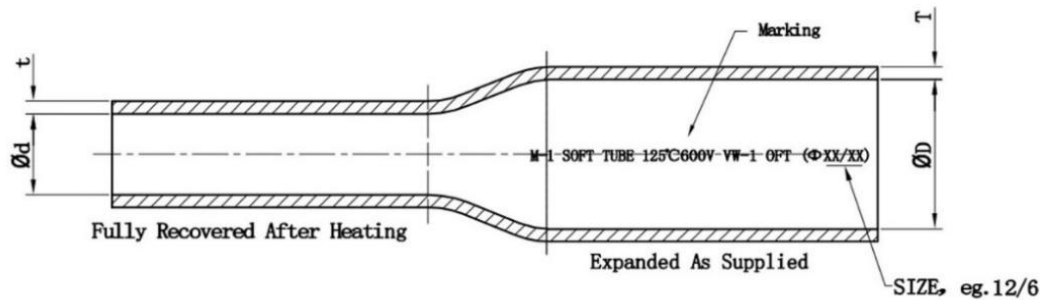

Item Code	Size (mm)	Expanded As Supplied (mm)		Fully Recovered After Heating (mm)		Standard Length (m)
		ØD	T	Ød	t	
IAME-M1-2/1- X	2 / 1	2.5	0.20	≤1.0	0.45	400
IAME-M1-4/2- X	4 / 2	4.7	0.25	≤2.0	0.45	400
IAME-M1-6/3- X	6 / 3	6.5	0.28	≤3.0	0.56	200
IAME-M1-10/5- X	10 / 5	10.5	0.30	≤5.0	0.56	100
*IAME-M1-12/6- X	12 / 6	12.5	0.30	≤6.0	0.56	100
IAME-M1-14/7- X	14 / 7	14.5	0.35	≤7.0	0.70	100
IAME-M1-15/7.5- X	15 / 7.5	15.5	0.35	≤7.5	0.70	100
IAME-M1-16/8- X	16 / 8	16.5	0.35	≤8.0	0.70	100
IAME-M1-20/10- X	20 / 10	22.0	0.40	≤10.0	0.83	100
IAME-M1-25/12.5- X	25 / 12.5	26.0	0.45	≤12.5	0.90	50
IAME-M1-30/15- X	30 / 15	32.0	0.45	≤16.0	1.00	50
IAME-M1-35/18- X	35 / 18	37.0	0.45	≤18.0	1.00	50
IAME-M1-40/20- X	40 / 20	42.0	0.50	≤20.0	1.00	50
*IAME-M1-50/25- X	50 / 25	52.5	0.50	≤25.0	1.10	25
IAME-M1-60/30- X	60 / 30	62.5	0.55	≤30.0	1.10	25
*IAME-M1-80/40- X	80 / 40	82.5	0.55	≤40.0	1.20	25
IAME-M1-100/50- X	100 / 50	102.5	0.60	≤50.0	1.20	25
**IAME-M1-120/60- X	120 / 60	122.5	0.60	≤60.0	1.30	25
**IAME-M1-125/63- X	125 / 63	127.0	0.65	≤63.0	1.30	25

Notes:

1. All items are available in Green, Grey and Brown. Items in Grey and Brown are non-stock items, available upon request, subject to lead time and availability.
2. * Items in Green are non-stock items.
3. ** Non-stock items for all colours.