


FUSEGEAR ELECTRIC H.R.C FUSE LINK

High- rupturing capacity (HRC) fuse links designed for low-voltage industrial and general applications.

Compliant with IEC 60269. KEMA tested.

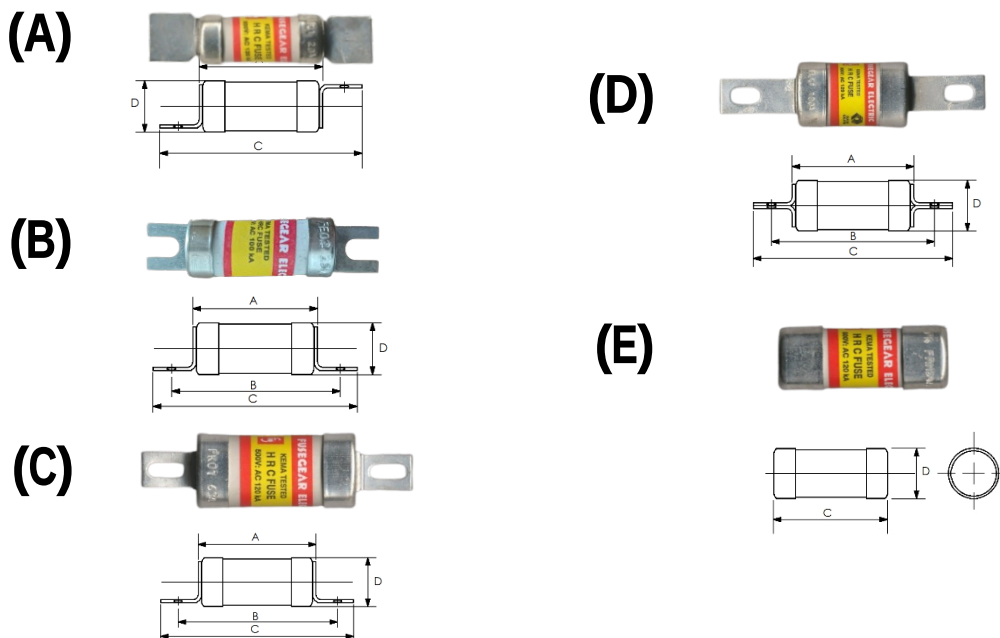

Note:

Type Ref.	Current Rating (A)	Breaking Capacity	Dimension				
			C (mm)	B (mm)	A (mm)	D (mm)	Type of tag
FE01 (A)	2,4,6,10,16,20,25,32	100kA at 500V	56.0	-	33.5	13.6	Staggered Blade
FE02 (B)	2,4,6,10,16,20,25,32	100kA at 500V	53.0	42.0	34.2	13.7	Offset
FG01 (C)	32	100kA at 500V	86.0	73.0	51.7	22.0	Offset
FK01 (C)	40,50,63	120kA at 500V	84.0	72.0	53.0	22.0	Offset
FL01 (D)	100	120kA at 500V	135.0	111.0	61.0	30.0	Central
FL03 (C)	80,100	120kA at 500V	109.0	92.0	63.0	27.0	Offset
FM01 (D)	125,160,200	120kA at 500V	135.0	111.0	62.0	38.0	Central
FN01 (D)	250,315,400	120kA at 500V	138.0	112.0	65.0	56.0	Central
FK-FRH (E)	15,30,40,50,60	120kA at 500V	57.0	-	-	22.0	NA
FL-FRH (E)	50,60,80,100	120kA at 500V	57.0	-	-	30.0	NA

1. Please contact our sales consultant before placing your order.