

MECHANICAL ALUMINIUM LUG (CENTER PALM)

A bolted alternative which does not require crimping tool or high operator skill.

Bolts are torque-controlled to ensure clean and proper shear-offs for good contact.



Solid palm eliminates ingress of moisture.

Made from high strength aluminium alloy. Surface is electro tin-plated.

Each lug is pre-filled with jointing compound and individually labeled.

Suitable for a wide range of LV and MV applications.

Approved with TNB Certificate of Product Acceptance (SGP).

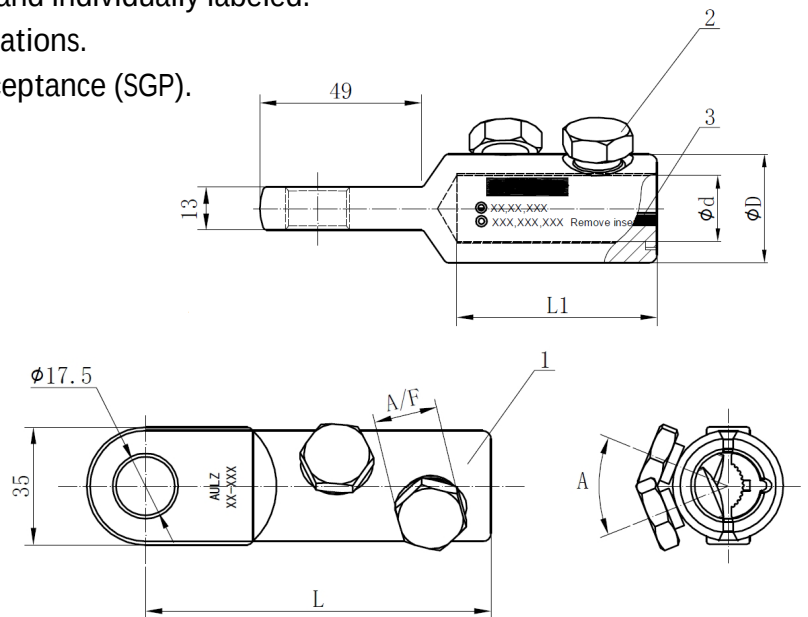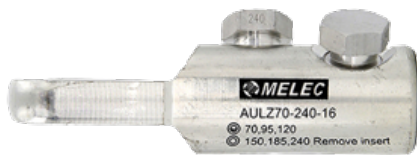

Conductor Size Range (mm ²)	Item Code	Stud Hole (mm)	No. of Bolts	Wrench Size	Dimensions (mm)					
					D	d	L1	L	A	AF
25-95	MLCA-AULZ25-95-16/1L	17.5	1	13	24	13.3	32	71	/	13
185-400	MLCA-AULZ185-400-16/3L	17.5	3	22	42	26.0	78	126	44°	22
300-630	MLCA-AULZ300-630-16/3L	17.5	3	22	52	33.0	90	142	50°	24

Conductor Size Range (mm ²)	Item Code	Stud Hole (mm)	No. of Bolts	Wrench Size	Dimensions (mm)					
					D	d	L1	L	A	AF
70-240	MLCA-AULZ70-240-XX/2L	13.0	2	19	33	20	61	103	44°	19
		17.5	2	19	33	20	61	103	44°	19

Notes:

- Please contact our sales consultant before placing your order.