




A2 CABLE GLAND

Used with all types of non-armoured cable.

For sealing and terminating device to ensure that the characteristics of the enclosure which the cable enters can be maintained adequately.

Suitable for all types of electrical power, control, instruments, data and telecommunications cable.

This cable gland is designed and tested as per BS 6121: Part 1: 1989. It meets the requirements of EN50262:1999

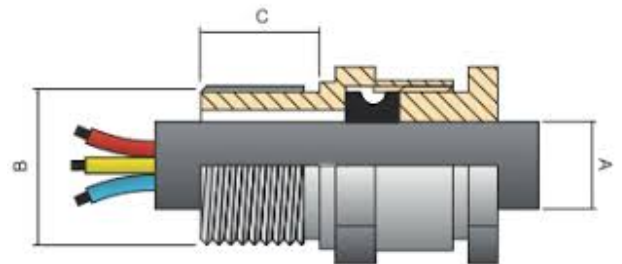

Brand : RUPAM
Ingress Protection Rating : IP66
Standard Gland Material : Brass
Optional Gland Material : Nickel-plated brass
Sealing Area(s) : Cable outer sheath

Item Code	Gland Size	Entry Thread		Cable Acceptance Details		
		Dia. 'B'	Length Min. 'C'	Dia. 'A' Max	Across Flat	Across Corner
ACCG-A2-20S	20S	20	15	8.00 - 11.70	24.50	25.00
ACCG-A2-20L	20L	20	15	11.00 - 14.00	24.00	26.60
ACCG-A2-25S	25S	25	15	12.00 - 17.00	27.00	30.50
ACCG-A2-25L	25L	25	15	13.00 - 20.50	29.50	33.00
ACCG-A2-32S	32S	32	15	16.50 - 23.00	35.00	38.50
ACCG-A2-32L	32L	32	15	19.00 - 26.30	39.00	43.00
ACCG-A2-40S	40S	40	20	23.00 - 29.00	43.00	48.00
ACCG-A2-40L	40L	40	20	25.00 - 33.00	46.00	51.00
ACCG-A2-50S	50S	50	20	31.50 - 39.00	56.00	62.00
ACCG-A2-50L	50L	50	20	36.50 - 44.00	62.00	68.00
ACCG-A2-63S	63S	63	20	42.50 - 50.00	66.00	73.00
ACCG-A2-63L	63L	63	20	48.00 - 56.00	72.00	79.00
ACCG-A2-75S	75S	75	20	54.50 - 62.00	77.00	85.00
ACCG-A2-75L	75L	75	20	60.50 - 68.00	86.00	95.00

Notes:

1. All dimensions are in mm.
2. Please contact our sales consultant before placing your order.

