

LOW VOLTAGE CABLE LINK


Use for Copper Conductor.

Crimp Type for Hexagon and Indent Die.

High Conductivity Copper : 99% I.A.C.S

Copper Purity : 99.9%

Finishing : Tin Plated

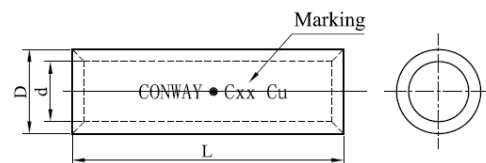

Compliant to MS1779 (Malaysian Standard).

Size (mm ²)	Item code	L	D	d	Crimping Tool	Hexagon Die A/F	No. Of Crimps
1.5	CFMS-1.5	18	3.35	1.75	TOPT-KH-8	Indent	1
2.5	CFMS-2.5	18	3.9	2.3	TOPT-KH-8	Indent	1
4	CFMS-4	19	4.7	3.0	TOPT-KH-8	Indent	1
6	CFMS-6	20	5.3	3.6	TOPT-KH-8	Indent	1
10	CFMS-10	23	6.3	4.3	TOPT-KH-8	Indent	1
16	CFMS-16	30	7.8	5.6	TCCP-300	6.4	1
25	CFMS-25	34	9.3	7.0	TCCP-300	7.7	1
35	CFMS-35	38	10.8	8.4	TCCP-300	8.9	1
50	CFMS-50	40	12.5	9.5	TCCP-300	10.3	1
70	CFMS-70	45	14.4	11.2	TCCP-300	11.9	1
95	CFMS-95	50	17.5	13.5	TCCP-300	14.5	1
120	CFMS-120	54	19.0	14.6	TCCP-300	15.7	2
150	CFMS-150	65	21.4	16.4	TCCP-300	17.6	2
185	CFMS-185	68	23.7	18.5	TCCP-300/ 630	19.5	2/ 1
240	CFMS-240	95	27.4	21.0	TCCP-300/ 630	22.6	3/ 2
300	CFMS-300	100	30.5	23.5	TCCP-630	25.2	2
400	CFMS-400	115	34.0	26.2	TCCP-630	28.5	2
500	CFMS-500	120	38.6	30.0	TCCP-630	32.1	3
630	CFMS-630	130	44.7	34.5	TCCP-630	37.0	3
800	CFMS-800	150	48.6	37.0	TCCP-1000	41.6	3
1000	CFMS-1000	165	53.4	40.2	TCCP-1000	46.2	3

Notes:

1. All dimensions are in mm.
2. Special long barrel, multi-hole and other dimension customizations are available upon request.

